

e-STUDIO2000AC

e-STUDIO2500AC

Datasheet



- > These two A3 colour systems are the perfect entry models for businesses looking for excellent performance and value.
- > A tablet-like, customisable user interface lets you enjoy the same sophisticated technology as Toshiba's high-end models.
- > Both models deliver impressive document output at a speed of up to 25 ppm and cover all print, scan, copy; and fax needs of modern businesses.

Small and medium workgroups looking for quality colour will appreciate the fact that the e-STUDIO2500AC series is easy to integrate into customer workflow needs.

The high-quality 22.9 cm (9") tablet-style multi-touch screen can be personalised according to users preferences and needs.

Mobile printing is important and Toshiba's new systems give you full flexibility to do so. All models can easily connect to mobile devices via AirPrint, Google Cloud Print or the Mopria Print Service.

All e-BRIDGE Next models fulfill the highest security standards to protect your data from unwanted access. So whether you are looking for document security, device security or access security - our new systems have it all.

SPECIFICATIONS

General

Print & Copy Speed	20/25 ppm (A4) 10/12 ppm (A3)
Warm-up Time	Approx. 13 seconds from low power mode
Paper Size & Weight	Cassette: A5R-A3, 60-163 g/m ² Bypass: 100 x 148 mm - A3 mm, 60-209 g/m ²
Paper Capacity	1 x 250 sheets (Cassettes), 1 x 100 sheets (Bypass) Maximum 2,900 sheets
Inner Output Tray	550-sheet capacity
Automatic Duplex	A5R-A3, 60-163 g/m ²
Controller Type	Toshiba e-BRIDGE
Control Panel	22.9 cm (9") Multi-Touch Colour Panel
Memory	Toshiba Secure HDD 320 GB ²⁾ , 4 GB RAM
Interface	10Base-T/100Base-TX/1000Base-T, High Speed USB 2.0, WLAN ¹⁾ (IEEE802.11b/g/n), Bluetooth ¹⁾ , WiFi Direct ¹⁾
Dimensions & Weight	575 x 585 x 662 mm (W x D x H), ~ 65 kg
Starter Kit	Drum, developer, waste toner box

Print

Resolution	600 x 600 dpi, 600 x 1,200 dpi (1 bit, PostScript driver only)
Page Description Language	PCL5e, PCL5c, PCL6 (PCL XL), XPS and PostScript 3 compatible
Supported Systems	Windows 10/8/7/Vista/Server 2008 (32/64 bit), Windows Server 2012/Server 2008 R2 (64 bit), Mac OS X 10.6.8-10.11, Linux/Unix, Citrix, Novell NetWare (NDPS), SAP, AS/400
Network Protocols	TCP/IP (IPv4/IPv6), IPX/SPX, EtherTalk, NetBios over TCP/IP
Colour Modes	Auto-Colour (ACS), Colour, Twin Colour, Monochrome
Colour Settings	ICC profile colour management, RGB substitution, Brightness, Saturation, Contrast, Colour Balance
Mobile Printing	e-BRIDGE Print & Capture, AirPrint, Mopria Print Service, Google Cloud Print
Print Functions	Universal Printer Driver, Driver Templates, Print from USB, Hold print, Tandem printing

Scan

Resolution	Maximum 600 x 600 dpi
Scan Speed	Reversing Automatic Document Feeder ¹⁾ : up to 73 ipm (300 dpi) in colour and monochrome
Scan Modes	Auto-Colour (ACS), Colour, Greyscale, Monochrome
File Formats	JPEG, Multi/Single Page TIFF/XPS/PDF, Secure PDF, Slim PDF, PDF/A, Searchable PDF ¹⁾ (and other formats like DOCX, XLSX, RTF, TXT) ¹⁾
Scan Functions	WS Scan, Scan to USB, Scan to E-Mail, Scan to File (SMB, FTP, FTPS, IPX/SPX, Local), Meta Scan ¹⁾ , OCR scan ¹⁾ , Scan to Box (e-Filing), WIA, TWAIN

Copy

Resolution	Scan: 600 x 600 dpi Print: 600 x 600 dpi, 2,400 x 600 dpi with smoothing
First Copy Output Time	Colour: Approx. 9.5 seconds Monochrome: Approx. 7.1 seconds
Zoom	25-400% (Platen), 25-200% (RADF) ¹⁾
Copy Modes	Text, Text/Photo, Photo, Printed Image, Map, Image Smoothing
Colour Modes	Auto-Colour (ACS), Full Colour, Twin Colour, Mono Colour, Monochrome
Colour Settings	Hue, Saturation, Colour Balance, RGB adjustment 5 one-touch modes
Copy Functions	Electronic Sort, Rotate Sort, ID Card Copy, Edge Erase, 2-in-1 / 4-in-1 mode

Fax¹⁾

Communication	Super G3, G3 - (opt. 2 nd line), Internet Fax T.37
Transmission Speed	Approx. 3 seconds per page
Compression	JBIG, MMR, MR, MH
Fax Memory	1 GB Transmission/Reception
Network-Fax	Driver for Windows 10/8/7/Vista/Server 2008 (32/64 bit), Server 2012/Server 2008 R2 (64 bit)
Incoming Fax Routing	To shared folders (SMB, FTP, IPX/SPX), E-Mail, e-Filing

System & Security

Device Management	e-BRIDGE Fleet Management System ¹⁾ , Top Access for remote administration and configuration
System Features	e-Filing document server for secure storage, Document distribution and Print-on-Demand (1 public box, 200 user boxes), 12,060 one-touch templates for storage of personalised settings or workflows, Scan/Fax Preview, Rip-while-Print, e-BRIDGE Open Platform ¹⁾ , Embedded Web Browser, Job Skip
Accounting & Security	Role Based Access, LDAP support, 1,000 depart- ment & 10,000 user codes, Card Reader ¹⁾ , Private print, Standard data encryption with Toshiba Secure HDD, Data Overwrite Enabler ¹⁾ , IP and MAC address filter, Port filter, Support of SSL and IPsec ¹⁾ protocols, IEEE802.1x support, IEEE2600.1 compliant ¹⁾ , Scan to Secure PDF



¹⁾ Optional


²⁾ 1 GB = 1 billion bytes; the actual formatted capacity is less.
Available capacity will also be less if software applications are pre-installed.

OPTIONS

REVERSING AUTOMATIC DOCUMENT FEEDER – MR-3031	100-sheet capacity, A5R-A3, 35-157 g/m ²
PAPER FEED UNIT – MY-1047	550-sheet capacity (1 Cassette), A5R-A3, 60-163 g/m ²
PAPER FEED PEDESTAL – KD-1058	550-sheet capacity (1 Cassette), A5R-A3, 60-163 g/m ²
DRAWER MODULE – MY-1048	For Paper Feed Pedestal 550-sheet capacity (1 Cassette) A5R-A3, 60-163 g/m ²
ENVELOPE DRAWER – MY-1049 <small>(can also be used for normal paper)</small>	For Paper Feed Pedestal Envelopes: 50-envelope capacity, 100 x 162 mm - 240 x 380 mm, 60-85 g/m ² Paper: 550-sheet capacity (1 Cassette), A5R-A4R, 60-163 g/m ²
LARGE CAPACITY FEEDER – KD-1059A4	2,000-sheet capacity, A4, 64-105 g/m ²
INNER FINISHER – MJ-1042	2 trays, 600-sheet capacity 50-sheet multi-position stapling A4R-A3, 60-105 g/m ² (stapling mode)
SADDLE-STITCH FINISHER – MJ-1110	2 trays, 3,250-sheet capacity 50-sheet multi-position stapling 5-sheet center folding Saddle-stitched booklets of up to 60 pages A4R-A3, 60-105 g/m ² (stapling mode)
HOLE PUNCH UNIT – MJ-6011E/MJ-6011F/MJ-6011S, MJ-6105E/MJ-6105F/MJ-6105S	Available in 2 holes (E), 4 holes (F), 4 holes (S)

PLATEN COVER – KA-5005PC
DESK – MH-5005
HARD DISK DRIVE 320 GB²⁾ (FIPS 140-2 STANDARD) – GE-1230
JOB SEPARATOR – MJ-5014
WORK TRAY – KK-5005
USB HUB – GR-1270
ACCESSORY TRAY – GR-1250
PANEL TEN-KEY OPTION – GR-1260
FAX BOARD – GD-1370EU
WIRELESS LAN / BLUETOOTH MODULE (incl. WiFi Direct) – GN-4020
e-BRIDGE ID-GATE – TWN3/4
DATA OVERWRITE ENABLER – GP-1070
IPsec ENABLER – GP-1080
HARDCOPY SECURITY PRINTING KIT – GP-1190A
EMBEDDED OCR ENABLER – GS-1080, GS-1085
MULTI-STATION PRINT ENABLER – GS-1090, GS-1095
META SCAN ENABLER – GS-1010
UNICODE FONT ENABLER – GS-1007
ACCESSIBLE ARM – KK-2560

CONFIGURATION

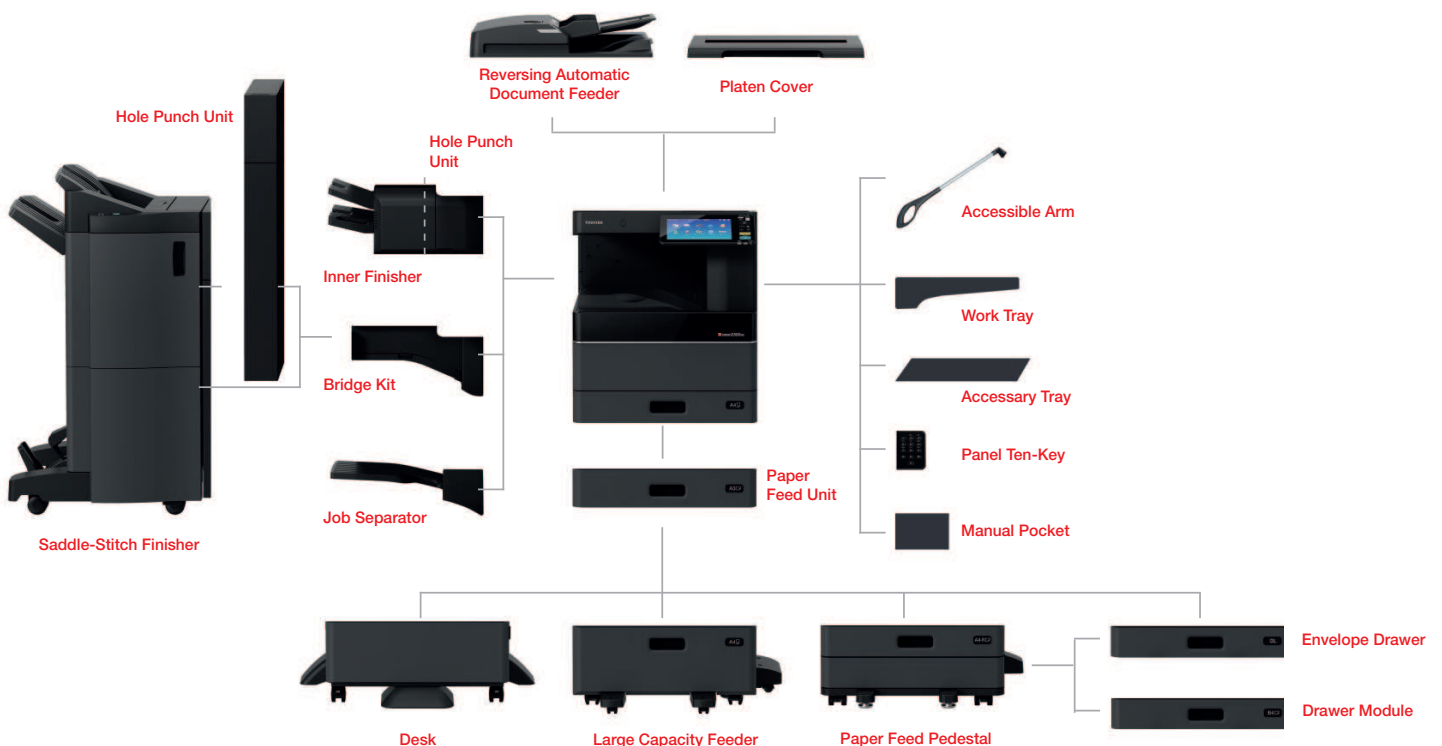

About Toshiba Tec

Toshiba Tec Germany Imaging Systems GmbH is part of the globally operating Toshiba Tec Corporation, active in various high-tech industrial sectors.

Toshiba Tec Corporation is a leading provider of information technology, operating across multiple industries - ranging from retail, education and business services to hospitality and manufacturing. With headquarters in Japan and over 80 subsidiaries worldwide, Toshiba Tec Corporation helps organisations transform the way they create, record, share, manage, and display information.

For more information please contact us:

Toshiba Tec Germany Imaging Systems GmbH

Carl-Schurz-Str. 7
41460 Neuss
Germany

Telephone

+49 2131-1245-0

Fax

+49 2131-1245-402

Website

www.toshibatec.eu

Together Information is Toshiba's vision for how people and organisations create, record, share, manage and display ideas and data.

It is based on our belief that the most successful organisations are those that communicate information in the most efficient way.

We make that possible through an integrated portfolio of industry specific solutions, all of which reflect Toshiba's commitment to the future of the planet.

