TOSHIBA

STUDIO2528A STUDIO3028A STUDIO3528A STUDIO4528A STUDIO5528A STUDIO5528A

Datasheet

- High-performance A3 monochrome multifunctional systems with speed up to 65 ppm for demanding print, copy, scan, and fax applications
- Wide range of integration options through powerful e-BRIDGE Next system platform
- High level of usability due to individually designable user interface as well as additional individual programming
- Maximum protection of sensitive data through numerous security functions such as hard disk encryption and access authorisations
- Environmental protection at the highest level: low energy consumption as well as energysaving mode help to preserve resources







Specifications

General

Print & Copy Speed	A4: 25/30/35/45/55/65 ppm A3: 16/16/25/25/27/30 ppm
Warm-up Time	~ 14/14/16/16/20/20 seconds from low power mode
Paper Size & Weight	Cassette ⁽¹⁾ : A5R-A3, 60-256 g/m ² Cassette ⁽²⁾ : A5R-A3 / A5R-320 x 460 mm, 60-300 g/m ² Bypass ⁽¹⁾ : 100x148 mm-A3, 52-256g/m ² Bypass ⁽²⁾ : 100x148 mm-320 x 460 mm, 52-300g/m ² Banner paper: up to 305 x 1,200 mm, 90-163 g/m ²
Paper Capacity	Cassettes: 2x 550 sheets Bypass: 1x 100 sheets Max. 5,200 sheets
Inner Output Tray	400-sheet capacity $^{(2)}$, 550-sheet capacity $^{(1)}$
Automatic Duplex	A5R-A3, 60-256 g/m ²
Controller Type	Toshiba e-BRIDGE Next
Control Panel	26 cm (10.1") Multi-Touch Colour Panel
Memory	Security SSD 128 GB ^{(1),(3)} , 4 GB RAM Security SSD 128 GB ^{(2),(3)} , 6 GB RAM
Interface	10Base-T/100Base-TX/1000Base-T, High Speed USB 2.0, WLAN* (IEEE802.11b/g/n), Bluetooth*, Wi-Fi Direct*
Dimension & Weight	For e-STUDIO2528A/3028A: 585 x 586 x 787mm (W x D x H), ~55kg For e-STUDIO3528A/4528A: 585 x 586 x 787mm (W x D x H), ~57kg For e-STUDIO5528A/6528A: 585 x 641 x 787mm (W x D x H), ~72 kg
Starting Kit	Drum, Developer ⁽²⁾ , Waste Toner Box ⁽²⁾

Сору

Resolution	Scan: 600 x 600 dpi Print: 600 x 600 dpi, 1 bit ⁽¹⁾ / 600 x 600 dpi, 5 bit ⁽²⁾ equiv. 2,400 x 600 dpi (with smoothing)
First Copy Output Time	~ 4.3/4.3/3.6/3.6/4.3/4.3 seconds
Zoom	Platen*: 25-400%, RADF*/DSDF*: 25-200 %
Copy Modes	Text, Text/Photo, Photo, Custom
Copy Functions	Electronic Sort, Rotate Sort, ID Card Copy, Edge Erase, 2-in-1 / 4-in-1 mode

Fax*

Communication	Super G3, G3 - (opt. 2 nd line)
Transmission Speed	~ 3 seconds per page
Compression	JBIG, MMR, MR, MH
Fax Memory	1 GB Transmission/Reception
Network-Fax	Driver for Windows 11/10/8.1, Windows Server 2022/2019/2016/Server 2012 R2/Server 2012 (64bit)
Incoming Fax Routing	To shared folders (SMB, FTP), E-Mail, e-Filing

System & Security

Device Management	Top Access for remote administration and configuration
System Features	e-Filing document server for secure storage, Document distribution and Print-on-Demand (one public box, 200 user boxes), User templates via function button (public area: 3,840 templates, private area: over 1.2 million templates possible), Scan/Fax Preview, Rip-while-Print, e-BRIDGE Open Platform, Embedded Web Browser, Job Skip, PCL Barcode printing, e-BRIDGE Plus embedded apps
Accounting & Security	Role Based Access, LDAP support, 1,000 department & 10,000 user codes, Card Reader*, Private Print, Standard data encryption with Security SSD, Data Overwrite function when optional HDD is chosen, IP and MAC address filter, Port Filter, Support of SSL and IPsec ^{III} protocols, IEEE802.1x support, CC certified (ISO/IEC15408) with HCD-PP v1.0*, Scan to Secure PDF



⁽¹⁾ For e-STUDIO2528A/3028A/3528A/4528A

- (a) For e-STUDIO2528A/6528A
 (c) For e-STUDIO5528A/6528A
 (c) I GB = 1 billion bytes; the actual formatted capacity is less. Available capacity will also be less if software applications are pre-installed. * Optional

Print

Resolution	600 x 600 dpi, 1 bit, equiv. 2,400 x 600 dpi (with smoothing)
	1200 dpi x 1200 dpi, 2 bit, equiv. 3,600 x 1,200 dpi (with PostScript Driver)
Page Description Language	PCL5e, PCL5c, PCL6 (PCL XL), XPS, PDF, and PostScript 3
Supported Systems	Windows 11/10/8.1, Windows Server 2022/2019/2016/2012 R2/2012 (64bit), Mac OS 10.12-12, Linux/Unix, Citrix, SAP, AS/400
Network Protocols	TCP/IP (IPv4/IPv6), NetBios over TCP/IP
Mobile Printing	e-BRIDGE Print & Capture, Mopria® Print Service, AirPrint
Print Functions	Universal Printer Driver, Driver Templates, Driver plug-ins*, Print from USB, Hold Print, Tandem Printing, E-Mail direct printing

Scan

Resolution	Max. 600 x 600 dpi
Scan Speed	Reversing Automatic Document Feeder (RADF)*: up to 73 ppm (300 dpi) in colour and monochrome Dual Scan Document Feeder(DSDF)*: up to 240ppm (300dpi) in colour and monochrome
Scan Modes	Auto-Colour (ACS), Colour, Greyscale, Monochrome
File Formats	JPEG, Multi/Single Page TIFF/XPS/PDF, Secure PDF, Slim PDF, PDF/A, PDF/A-2, Searchable PDF (and other formats like DOCX, XLSX)
Scan Functions	WS Scan, Scan to USB, Scan to E-Mail, Scan to File (SMB, FTP, FTPS, Local), Meta Scan*, OCR scan, Scan to Box (e-Filing), WIA, TWAIN

Options

REVERSING AUTOMATIC DOCUMENT FEEDER-MR-303	100-sheet capacity, A5R-A3, 35-157 g/m ² 3
DUAL SCAN DOCUMENT FEEDER-MR-4010	300-sheet capacity, A5R-A3, 35-209 g/m 2
DUAL SCAN DOCUMENT FEEDER WITH DOUBLE FEED DETECTION-MR-4020	300-sheet capacity, A5R-A3, 35-209 g/m²
PAPER FEED PEDESTAL-KD-1072	550-sheet capacity (1 Cassette), A5R-A3, 60-256 g/m ²⁽¹⁾ , 60-300 g/m ²⁽²⁾
DRAWER MODULE - MY-1052	For Paper Feed Pedestal 550-sheet capacity (1 Cassette) A5R-A3, 60-256g/m² ⁽¹⁾ , 60-300 g/m² ⁽²⁾
ENVELOPE DRAWER-MY-105 (can also be used for standard paper	
LARGE CAPACITY FEEDER- KD-1073A4	2,000 sheets, A4, 60-256 g/m $^{2(1)},$ 60-300 g/m $^{2(2)}$
EXTERNAL LARGE CAPACITY FEEDER-MP-2002A	2,000 sheets, A4, 60-256 g/m ^{2 (1)} , 60-300 g/m ^{2 (2)}
INNER FINISHER-MJ-1048	2 trays, 600-sheet capacity 50-sheet multi-position stapling A4R-A3, 60-105 g/m²(stapling mode)
MULTI-STAPLE FINISHER- MJ-1113	2 trays, 2,250-sheet capacity 65-sheet multi-position stapling A4R-A3, 60-105 g/m² (stapling mode)
SADDLE STITCH FINISHER- MJ-1114	2 trays, 3,250-sheet capacity Saddle-stitched booklets of up to 60 pages 65-sheet multi-position stapling A4R-A3, 60-105 g/m² (stapling mode)


HOLE PUNCH UNIT-MJ-6107E,MJ-6107F,MJ6107S MJ-6011E,MJ-6011F,MJ6011S

Available in 2- and 4- holes - for Finisher MJ-1113/MJ-1114 - for Finisher MJ-1048

	PLATEN COVER-KA-5005PC
	DESK-MH-5005
	HARD DISK DRIVE 320 GB ⁽³⁾ (FIPS 140-2 STANDARD incl. Data Overwrite)-GE-1260
	SECURITY SOLID STATE DRIVE 512 GB ⁽³⁾ -GE-1280
	WORK TRAY-KK-5005
	JOB SEPARATOR-MJ-5015
	FAX BOARD-GD-1370EU
	USB HUB-GR-1420
	ACCESSORY TRAY-GR-1330
e),	PANEL TEN-KEY-GR-1340
	WIRELESS LAN/BLUETOOTH MODULE (incl. Wi-Fi Direct)-GN-4030-A3
	CARD READERS
2 (2)	ACCESSIBLE ARM-KK-2560
2 (2)	
2(2)	IPsec ENABLER (LICENCE)-GP-1080Node
	MULTI STATION PRINT ENABLER (LICENCE)-GS-1090Node
	META SCAN ENABLER (LICENCE)-GS-1010Node
	UNICODE FONT ENABLER (LICENCE)-GS-1007Node

BRIDGE KIT-KN-5005

Configuration

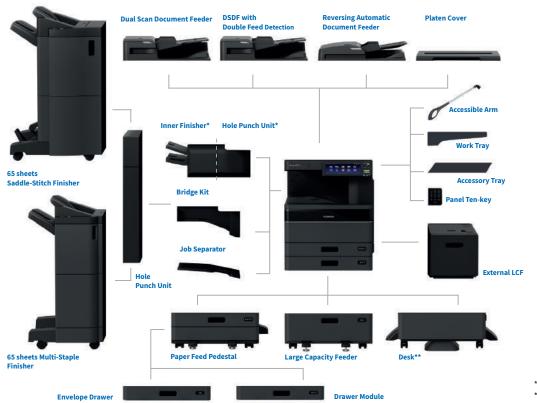

* Fore-STUDIO2528a/3028a/3528a/4528a ** Not in combination with External LCF

About Toshiba Tec

Toshiba Tec Germany Imaging Systems GmbH is part of the globally operating Toshiba Tec Corporation, active in various high-tech industrial sectors.

Toshiba Tec Corporation is a leading provider of information technology, operating across multiple industries - ranging from retail, education and business services to hospitality and manufacturing. With headquarters in Japan and over 80 subsidiaries worldwide, Toshiba Tec Corporation helps organisations transform the way they create, record, share, manage and display information.

For more information please contact us:

Toshiba Tec Germany Imaging Systems GmbH

Carl-Schurz-Str. 7 41460 Neuss Germany

Telephone

+49 2131-1245-0

Fax

+49 2131-1245-402

Website

www.toshibatec.eu

Together Information is Toshiba's vision for how people and organisations create, record, share, manage and display ideas and data.

It is based on our belief that the most successful organisations are those that communicate information in the most efficient way.

We make that possible through an integrated portfolio of industry-specific solutions, all of which reflect Toshiba's commitment to the future of the planet.

Technical data is subject to change without prior notice. All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries. All rights reserved. We are constantly making efforts to deliver the latest status of data to our partners. Specifications for some models may change in the time between the production and the release of this documentation. Copyright ©2022 Toshiba Tec. DS_e-STUDI06528A_Series_202205_IDD

